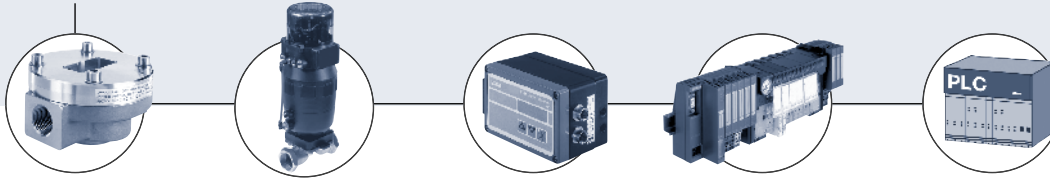


- Large graphical display
- Indication, monitoring, transmitting and On/Off control in one device
- Complete communication due to external setpoint, process value or AS-interface
- Medium with high viscosity

Type 8072 can be combined with...

**Type S070**

Fitting

Type 2031/8631

ON/OFF valve with
Top Control

Type 1067

Continuous SIDE
Control

Type 8644

Valve island with
electronic I/O

PLC

This intelligent positive displacement flow switch with an extra large display is specially designed to switch a valve and to establish a monitoring system or an On/Off control loop.


The switching points can be programmed with the 3-key keypad under the display or optionally, from an external PLC over a 4–20 mA loop. Additionally the process value

can be transmitted to the PLC by means of a 4–20 mA signal. The connection to the process in the piping is done with quarter-turn technique of the INLINE fittings.

Technical data		Other materials	
Pipe diameter	1/2 in – 3 in (DN15 – DN50)	Electronics housing	PC +20% glass-fibre
Measurement range		Front plate foil	Polyester
>5cP	0.26 to 93 gpm (1 to 350 l/min)	Sensor element	Oval rotor of fitting type S070
<5cP	6.6 to 79 gpm (3 to 300 l/min)	Operating voltage	12 to 30 V DC, reverse polarity protected
Medium speed	max. 23 ft/s (7 m/s)	Outputs	
Maximum particle size	0.25 mm	Transistor (programmable)	NPN/PNP, open collector, 5 to 30 V DC, 700 mA max., protected against short circuits
Viscosity	max. 1000 cP	Relay (programmable)	3 A/250 VAC or 3 A/30 VDC, 3 A/48 VAC or 3 A/30 VDC ¹⁾
Measuring accuracy	±0.5% of measured value	Process value (option)	4–20 mA, galvanic insulation, loop resistance: 1100 Ω at 32 V, 800 Ω at 24 V, 500 Ω at 18 V
Repeatability	0.03%	Input external setpoint	4–20 mA, galvanic insulation, max input impedanz 250 W
Relative humidity (RH)	≤ 80% non condensated	Current consumption	Max. 80 mA, no load
Media temperature		Recommended cable for power supply	Max. 100 m long, shielded, 0.14 to 0.5 mm ²
Aluminium body	176°F (+80°C)	Electrical connection	
Stainless steel body	212°F (+100°C)	Cable plug/Multipol connector	Type 2508, DIN 43650 Form A / 4,5,8-pin, M12
Ambient temperature	32°F to 140°F (0°C to +60°C)	AS-interface	Fieldbus
Storage temperature	32°F to 140°F (0°C to +60°C)	Protection class	IP65 with connectors plugged-in
Max. fluid pressure	Flange version 230 PSI Aluminium and stainless steel body 800 PSI		
Installation fittings	Type S070 see ordering chart		
Wetted materials			
Stainless steel fitting	Stainless steel 316 (1.4401)		
Aluminium fitting	PPS, stainless steel		
Seal	FKM (EPDM or PTFE optional)		

¹⁾ Valid for: External setpoint input, process value output and AS-Interface

Interconnection possibilities with 8072

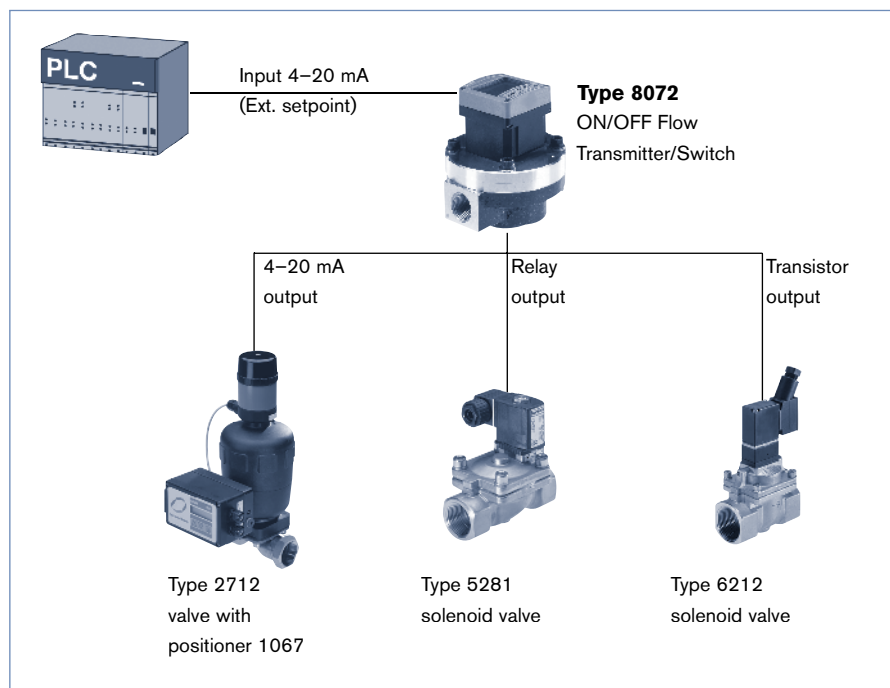

Standards

Standards	
EMC	EN 50081-1, 50082-2
Security	EN6101-2
Vibration	EN68-2-6
Shock	EN 68-2-27

Ordering chart display and electronic type SE32 for fitting S070

Voltage/ frequency	Inputs	Outputs	Connection possibilities	Item n.o. *
12 – 30 VDC	–	NPN transistor	Conduit/cable plug Type 2508, DIN 43650	US08572
		PNP transistor	Conduit/cable plug Type 2508, DIN 43650	US08571
		NPN and PNP transistors	5-pin circular connector M12	US08570
		Relay	5-pin circular connector M12	US08569
		Relay	5-pin circular connector M12 and conduit/cable plug type 2508 DIN 43650	
ASi Bus	ASi	ASi + Relay	4-pin circular connector M12 and conduit/cable plug type 2508 DIN 43650	US08567
		4-20 mA ¹⁾	4-20 mA ²⁾ + Relay	8-pin circular connector M12 and conduit/cable plug type 2508 DIN 43650

¹⁾External setpoint ²⁾Process value *Plugs included in part number

Ordering chart for fitting S070 (Aluminium)

Orifice DN [mm]	Process connection	Measuring range > 5 cP [g/min]	Measuring range < 5 cP [g/min]	Oval rotor material	Bearing material	Seal material	Item no.
1/2" (15)	1/2" NPT	0.5 – 8.0	0.8 – 6.6	PPS	St.St. 316 /1.4401	FKM	443 995 L
1" (25)	1" NPT	1.6 – 32	2.6 – 26	PPS	St.St. 316 /1.4401	FKM	443 996 M
1 1/2" (40)	1 1/2" NPT	2.6 – 66	4.0 – 62	PPS	St.St. 316 /1.4401	FKM	443 997 N
2" (50)	2" NPT	4.0 – 93	8.0 – 79	PPS	St.St. 316 /1.4401	FKM	553 641 E
3" (80)	3" NPT	5.0 – 194	17 – 163	Aluminium	St.St. 316 /1.4401	FKM	553 643 G

Ordering chart for fitting S070 (Stainless steel 316 / 1,4401)

Orifice DN [mm]	Process connection	Measuring range > 5 cPo [l/min]	Measuring range < 5 cPo [l/min]	Oval rotor material	Bearing material	Seal material	Item no.
1/2" (15)	1/2" NPT	0.5 – 8.0	0.8 – 6.6	St.St.316 /1.4401	St.St.316 /1.4401	FKM	444 000 F
1" (25)	1" NPT	1.6 – 32	2.6 – 26	St.St.316 /1.4401	St.St.316 /1.4401	FKM	444 001 U
1 1/2" (40)	1 1/2" NPT	2.6 – 66	4.0 – 62	St.St.316 /1.4401	St.St.316 /1.4401	FKM	444 002 V
1" (25)	1" ANSI 150 lb Flange	1.6 – 32	2.6 – 26	St.St.316 /1.4401	St.St.316 /1.4401	FKM	553 633 W
1 1/2" (40)	1 1/2" ANSI 150 lb Flange	2.6 – 66	4.0 – 62	St.St.316 /1.4401	St.St.316 /1.4401	FKM	444 003 W
2" (50)	2" ANSI 150 lb Flange	4.0 – 93	8.0 – 79	St.St.316 /1.4401	St.St.316 /1.4401	FKM	444 004 X

Ordering chart for accessories

Accessories	Item no.
5-pin M12 female cable connector with plastic threaded locking ring	917 116 D
5-pin M12 female connector moulded-on cable (2 m, shielded)	438 680 F
4-pin M12 male cable connector with plastic threaded locking ring	448 856 D
4-pin M12 male connector moulded-on cable (2 m, shielded)	448 857 E
8-pin M12 female cable connector with plastic threaded locking ring	444 799 G
8-pin M12 female connector moulded-on cable (2 m)	444 800 E
2-pin M12 female coupler module for ribbon cable (AS-Interface version only)	440 653 M